

PM STANDARD RIDGE AND ARRIS ROLL



PM STANDARD RIDGE AND ARRIS ROLL is a simple, fast solution for safe roof ventilation. It fulfils the regulations of the German Roofing Association, which require safe, permanent roofing ventilation to prevent damage caused by moisture.

PM STANDARD RIDGE AND ARRIS ROLL combines different materials to create a compact system that fulfils requirements for ventilation and safety even in the rain or snow. Ventilation through the ridge and arris are ensured thanks to the specialised structure of the material. Despite the open surface, PM STANDARD RIDGE AND ARRIS ROLL remains sealed, offering excellent protection against moisture penetration.

The roll is highly flexible and lays independently on the top row of roofing tiles. An additional seam ensures the aluminium and mesh materials are bonded together at all times. PM STANDARD RIDGE AND ARRIS ROLL stands out with its flexibility and ease of finishing, and can be attached to the centre of the ridge batten with a stapler or with nails. It offers excellent breathability in the centre section, and is highly UV resistant and waterproof thanks to environmentally-resistant materials. The flanged edge protects against injuries.


Technical Data

Side strip material	Colour-coated aluminium
Cover strip material	PP mesh
Adhesive strip material	Butyl rubber
Ventilation cross-section	fulfils DIN 4108 Part 3
Processing temperature	+5 °C to +30 °C
Temperature resistance	-20 °C to +80 °C
UV stability	Indirect radiation: ≥ 10 years
Colour (aluminium)	brick red, brown, anthracite*
Roll width	210 / 240 / 260 / 310 / 320 / 350 / 365 / 390 mm
Roll length	5 m

* Other colours available upon request

For more information, visit www.pmi-plast.de

INSTALLATION INSTRUCTIONS

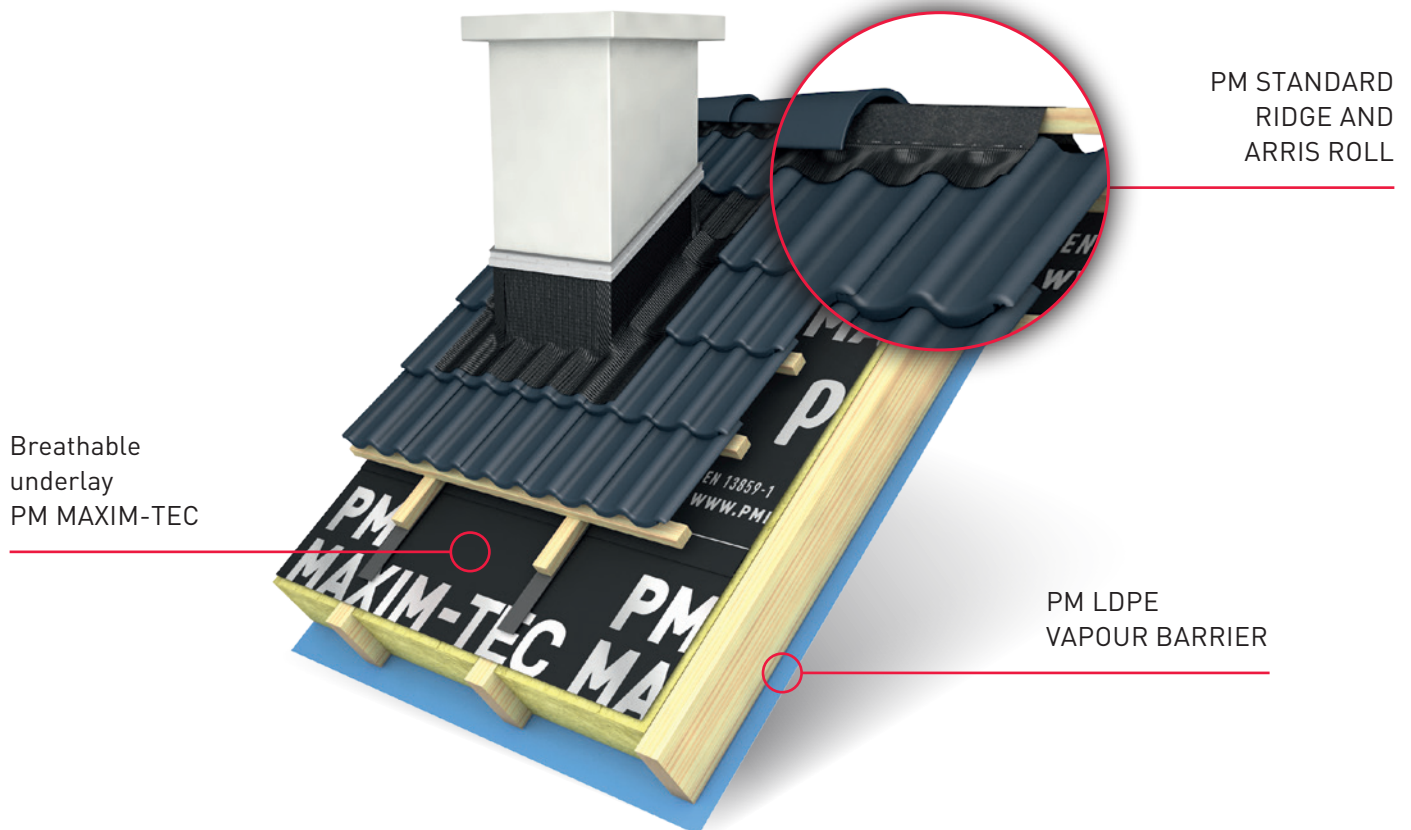

Breathable
underlay
PM MAXIM-TEC

PM STANDARD
RIDGE AND
ARRIS ROLL

PM LDPE
VAPOUR BARRIER

Instructions for use

After attaching the ridge batten to brackets, first remove any loose dust or dirt from the roofing tiles. Then unroll and align the PM STANDARD RIDGE AND ARRIS ROLL and attach the membrane by nailing or stapling it to the ridge batten. Then remove the cover foil from the butyl rubber adhesive strips and press the strips firmly into the area of the glue, once the roll is adjusted to the corrugations.

Advantages

PM STANDARD RIDGE AND ARRIS ROLL is suitable for universal use on almost all concrete roofing tiles and plain tiles, and also adapts very well to highly profiled roofing tiles. The ventilation cross-section of the specialised material fulfils the regulations of the German Roofing Association and DIN 4108 Part 3. PM STANDARD RIDGE AND ARRIS ROLL guarantees good resistance to rain and snow, is UV stabilised and weather resistant. The high temperature resistance of the adhesive allows the product to be installed easily in any weather. The STANDARD RIDGE AND ARRIS ROLL stands out with tested quality.

Accessories:

PM POWER FIX cartridge adhesive