

# PM P-25- GEOTEX 150



**NEW:**  
Roll with  
**25 MM**  
**DIMPLE HEIGHT**

PM P-25-GEOTEX 150 is a water retaining drainage membrane and is the ideal solution for extensive and intensive green roofs.

PM P-25-GEOTEX 150 offers many times the drainage and water storage capacity of other dimpled membranes and acts as a protection, filter, seepage and water storage layer in green roofs.

The 25 mm dimples have an enormous water storage capacity of approx. 11.0 litres/m<sup>2</sup>. The compressive strength of approx. 150 kN/m<sup>2</sup> offers a high level of safety and thus corresponds to a compressive load capacity of approx. 15 tonnes per m<sup>2</sup>. The 25 mm dimpled sheet also offers a disproportionately high drainage capacity of  $i = 1.00$ ; approx. 9.8 l/s · m. It can therefore also be used with very long drainage lengths and/or very low roof pitches. The plant substrate can be applied directly as the geotextile is already integrated. This saves an additional work step. Thanks to the perforation, the water-retaining drainage membrane is open to diffusion and can also be used for inverted roofs.

The geotextile should be removed in walk-on areas without greenery.


The bedding material can then be applied directly to the dimpled membrane without replacing the material, after which the paving or slab covering can be installed on top.

## Technical Data

Dimpled membrane	HDPE
Geotextile	PP
Dimple height	approx. 25 mm
Number of dimples	400 dimples/m <sup>2</sup>
Compressive strength	approx. 150 kN/m <sup>2</sup> = 15 t/m <sup>2</sup>
Colour	black
Water flow capacity in the plane, rigid – soft; $i = 1.0$ rigid – soft; $i = 0.01$ rigid – soft; $i = 0.02$ rigid – soft; $i = 0.03$	approx. 9.8 l/s·m at 20 kPa approx. 0.69 l/s·m at 20 kPa approx. 1.01 l/s·m at 20 kPa approx. 1.36 l/s·m at 20 kPa
Water storage	approx. 11.0 l/m <sup>2</sup>
Roll length	10 m or on request
Roll width	2.00 m plus 10 cm geotextile
Air volume between the dimples	approx. 14 l/m <sup>2</sup>
Temperature resistance	–30 °C to +80 °C
Chem. properties	chemical-resistant
Physiolog. properties	safe for drinking water
Characteristic opening width	approx. 170 µm
Water permeability EN ISO 11058	approx. 100 · 10 <sup>-3</sup> m/s
Fire behaviour	class E

For more information, visit [www.pmi-plast.de](http://www.pmi-plast.de)

# INSTALLATION INSTRUCTIONS

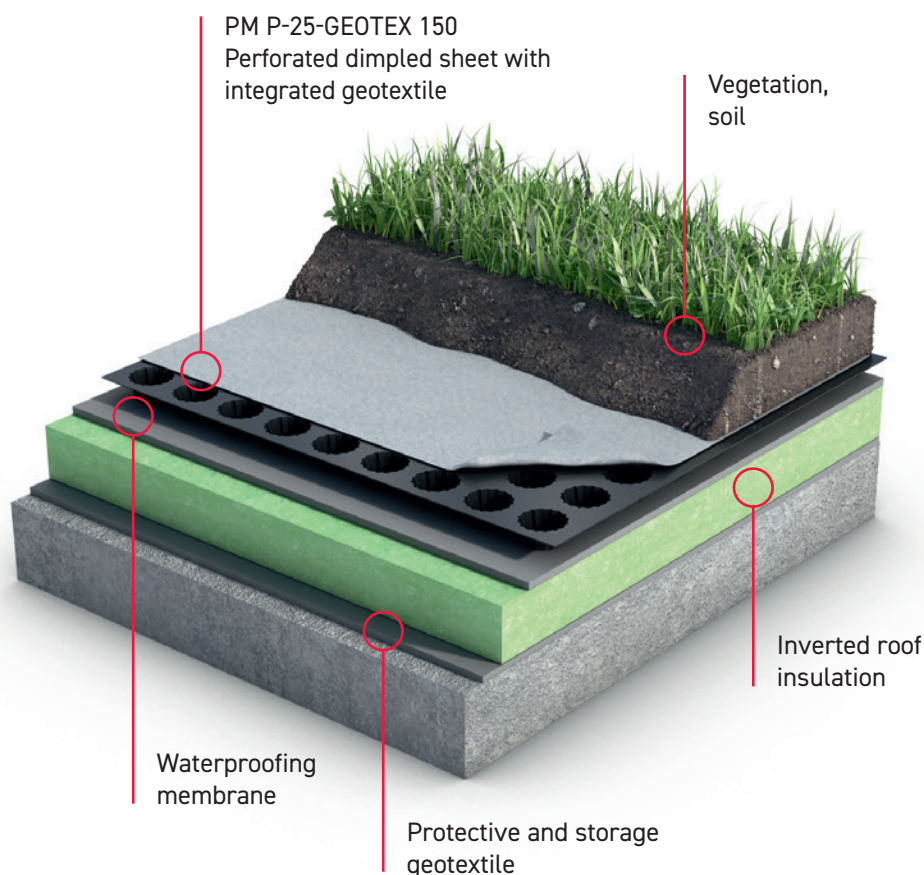

### Installation

The waterproofed surface must be thoroughly cleaned so that no damage can occur to the sealing after laying the drainage membrane. The waterproofing must be root-resistant according to the German FLL Green Roof Guideline or protected by a root protection membrane. Lay a geotextile as a protective and separating layer with at least 300 g/m<sup>2</sup> (according to the FLL guideline) on the waterproofing. PM P-25-GEOTEX 150 is laid horizontally with the dimples to the surface by rolling it out, with the filter-stable geotextile facing upwards. The dimpled membranes are overlapped by 10 cm (two rows of dimples). The dimpled mem-

brane can be cut to the required length with a knife, but do not damage the waterproofing. If the laid membranes have to be extended, the connecting membrane is pushed under at least 20 cm from below. The horizontal overlaps must be shingle-like in the direction of the water flow. On rising components, the PM P-25-GEOTEX 150 dimpled membrane should be raised at least 10 cm (2 rows of dimples). The dimpled membranes are laid step by step. The plant substrate can then be applied directly. Professionally install round gravel strips with a width of 30 cm at the roof edges and 20 cm around the roof inlets.